



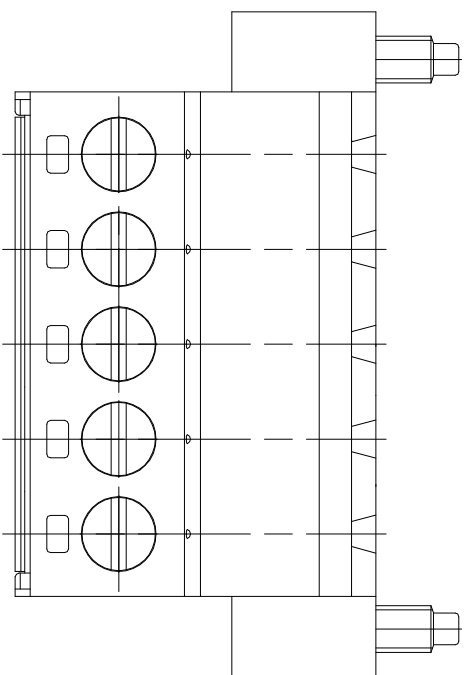

慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE

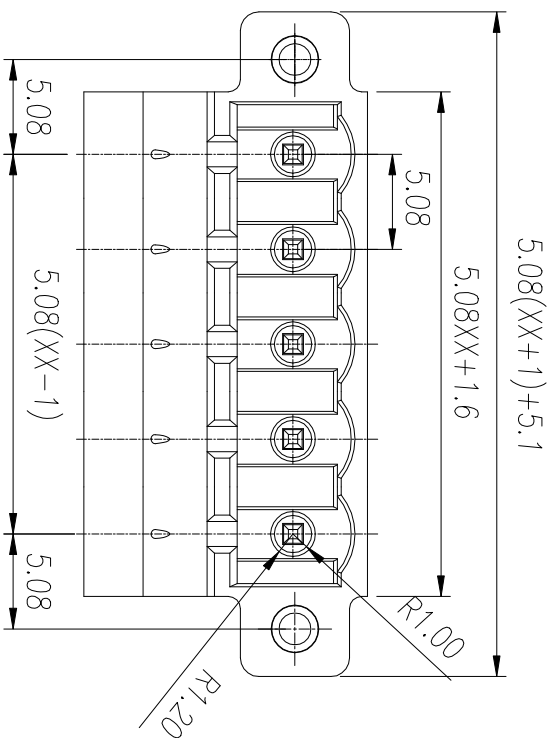

UL/CUL 技术参数		cRU [®] US				
UL/CUL	Technical Data	等级	Use Group	B	C	D
额定电压	Rated Voltage	V		300	-	300
额定电流	Rated Current	A		15	-	10
接线范围	Wire Range			28-12		
单/多芯线	Solid/Stranded	[AWG]				
耐压	Withstanding Voltage			1600V/1Min		
IEC 技术参数						
IEC Technical Data						
过电压类别	Overvoltage Category	III	III	III	II	
污染等级	Contamination Class	3	2	2	2	
额定电压	Rated Voltage	V		250	320	630
额定电流	Rated Current	A		12	12	12
额定冲击电压				4.0	4.0	4.0
Impulse withstand voltage	[kV]					
导线截面积	Conductor cross section			0.2-2.5		
硬质/柔性导线	Solid/flexible	[mm ²]				
材料						
材料	Material					
绝缘材料	Insulation Material	PA66				
阻燃等级	Inflammability	UL94V-0				
导体材料	Contact Material	铜合金 Copper alloy				
导体表面镀层	Contactive Coating	镀锡 Sn Plated				
一般参数						
间距	Pitch / 极数	Poles	[mm] / [P]	5.08 / 02-24		
引线长度	Shipping Length		[mm]	7-8		
螺丝	Screw/扭矩	Torque(Max)	[N.m]	M3.0x5		
工作温度	Operating temperature		[°C]	-40~105		
焊接温度	Soldering temperature			-		
引脚/尺寸	Pin Dimensions		[mm]	-		
PCB板孔径	PCB Hole Diameter		[mm]	-		

linear dimension(Tolerances Standard GB/T 14486-2008)	tolerance	tolerance	tolerance	tolerance	tolerance	tolerance	tolerance	tolerance	tolerance	tolerance	tolerance
over 6 to over 10 to over 30 to over 60 to over 100 to over 160 to	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	0.60
variable range	6 to 10	10 to 30	30 to 60	60 to 100	100 to 160	160 to 10	10 to 100	10 to 100	100 to 100		

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	5:2	
慈溪市万捷电子有限公司						
CIXI WANJIE ELECTRONIC CO., LTD						
名称 / TITLE	WJ2EDGKRM-5.08-XXP-1YY-00A				版本 / REV	V0

